

1500V DC

FERRULE FUSES/SPECIAL PURPOSE



Ratings	Features/Benefits
---------	-------------------



- **Blown Fuse** indicator striker .8 to 5A
- **20x127** ceramic cylindrical body
- **Full range** D.C. operation


CC 1551 CP gRB

- 0.8 to 5 Amps
- 1000vdc at 100kA
- L/R=100mSec

CC 1500 CP gRB

- 0.8 to 5 Amps
- 1000vdc 30kA
L/R = 30mSec
- Max AC Voltage (50/60Hz)
2500V @ 50k A I.R.

➤ Dimensions

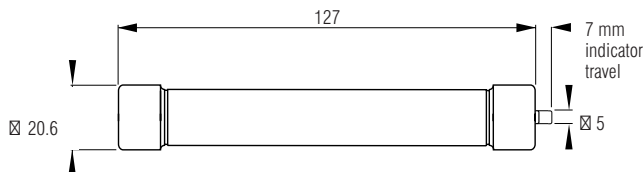

Indicator Trip Force: 4.5N (1lb) at 0mm-2.5N (1/2lb) at 7mm (1/4") - when so equipped*

APPLICATIONS DATA


SIZE (mm)	CURRENT RATING I _N (A)	INTERRUPTING RATING	WATTS LOSS		CATALOG NUMBER		REF. NUMBER	
			0.8 I _N	I _N	NEW	OLD		
20 x 127	0.8	@ 1000V DC 100kA L/R = 100ms	0.5	0.9	CC 1551 CP gRB 20x127/0.8	D 150 gRB 0.8 VI	E075743	
	1		0.5	0.9	CC 1551 CP gRB 20x127/1	D 150 gRB 001 VI	F075744	
	1.5		0.8	1.4	CC 1551 CP gRB 20x127/1.5	D 150 gRB 01.5 VI	G075745	
	2		0.9	1.6	CC 1551 CP gRB 20x127/2	D 150 gRB 002 VI	B088367	
	3.15		1.2	2.1	CC 1551 CP gRB 20x127/3.15	D 150 gRB 3.15 VI	H075746	
	4		1.3	2.1	CC 1551 CP gRB 20x127/4	D 150 gRB 004 VI	J075747	
	5		1.4	2.3	CC 1551 CP gRB 20x127/5	D 150 gRB 005 VI	C088368	
	0.8		@ 1500V DC 30kA L/R = 30ms	0.5	0.9	CC 1500 CP gRB 20x127/0.8	D 150 gRB 0.8 V	J081842
	1			0.5	0.9	CC 1500 CP gRB 20x127/1	D 150 gRB 001 V	R079894
	1.5			0.8	1.4	CC 1500 CP gRB 20x127/1.5	D 150 gRB 01.5 V	K081843
	2	0.9		1.6	CC 1500 CP gRB 20x127/2	D 150 gRB 002 V	Y099243	
	3.15	1.2		2.1	CC 1500 CP gRB 20x127/3.15	D 150 gRB 3.15 V	L081844	
	4	1.3		2.1	CC 1500 CP gRB 20x127/4	D 150 gRB 004 V	Z099244	
	5	1.4		2.3	CC 1500 CP gRB 20x127/5	D 150 gRB 005 V	A099245	
	6	@ 1500V DC 30kA L/R = 55ms		3.4	6.3	CC 1500 CP gRD 20x127/6	D 150 gRB 006 V	E082804
	8			3.3	6.0	CC 1500 CP gRD 20x127/8	D 150 gRB 008 V	Z080867
	10			3.5	6.1	CC 1500 CP gRD 20x127/10	D 150 gRB 010 V	F081655
	12		3.9	6.8	CC 1500 CP gRD 20x127/12	D 150 gRB 012 V	B080593	
	16		5	8.9	CC 1500 CP gRD 20x127/16	D 150 gRB 016 V	Q081457	
	20		5.3	9.6	CC 1500 CP gRD 20x127/20	D 150 gRB 020 V	D082803	
	25		6.6	12	CC 1500 CP gRD 20x127/25	D 150 gRB 025 V	A080431	

*Blown fuse indicator minimum trip voltage: 50V

1500V DC


FERRULE FUSES/SPECIAL PURPOSE

DC Voltage Capability vs. Time Constant

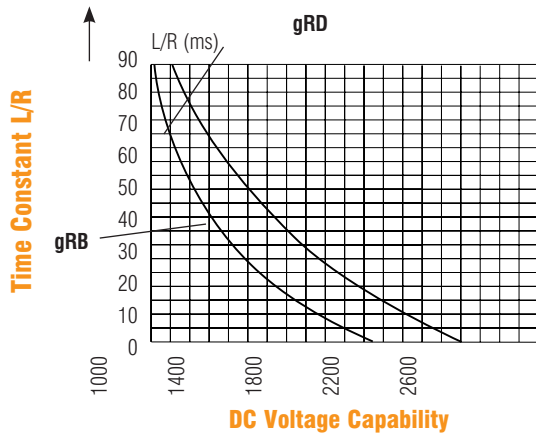

Above: Curves indicate maximum permissible value of time constant L/R as a function of DC working voltage.


Peak Arc Voltage vs. Working Voltage

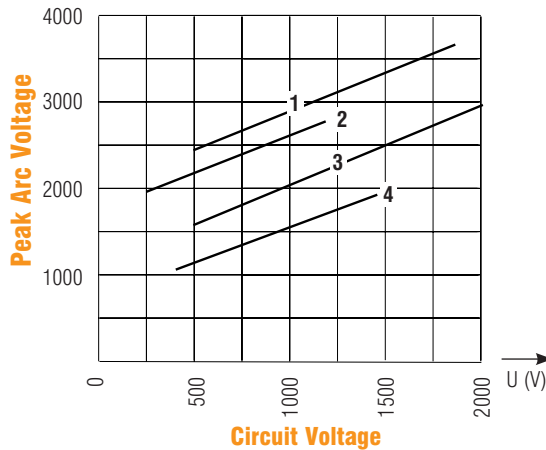

- Curve 1: gRD @ L/R = 30ms
- Curve 2: gRB @ L/R = 60ms
- Curve 3: gRD @ L/R = 15ms
- Curve 4: gRB @ L/R = 30ms



Melting Time-Current Data

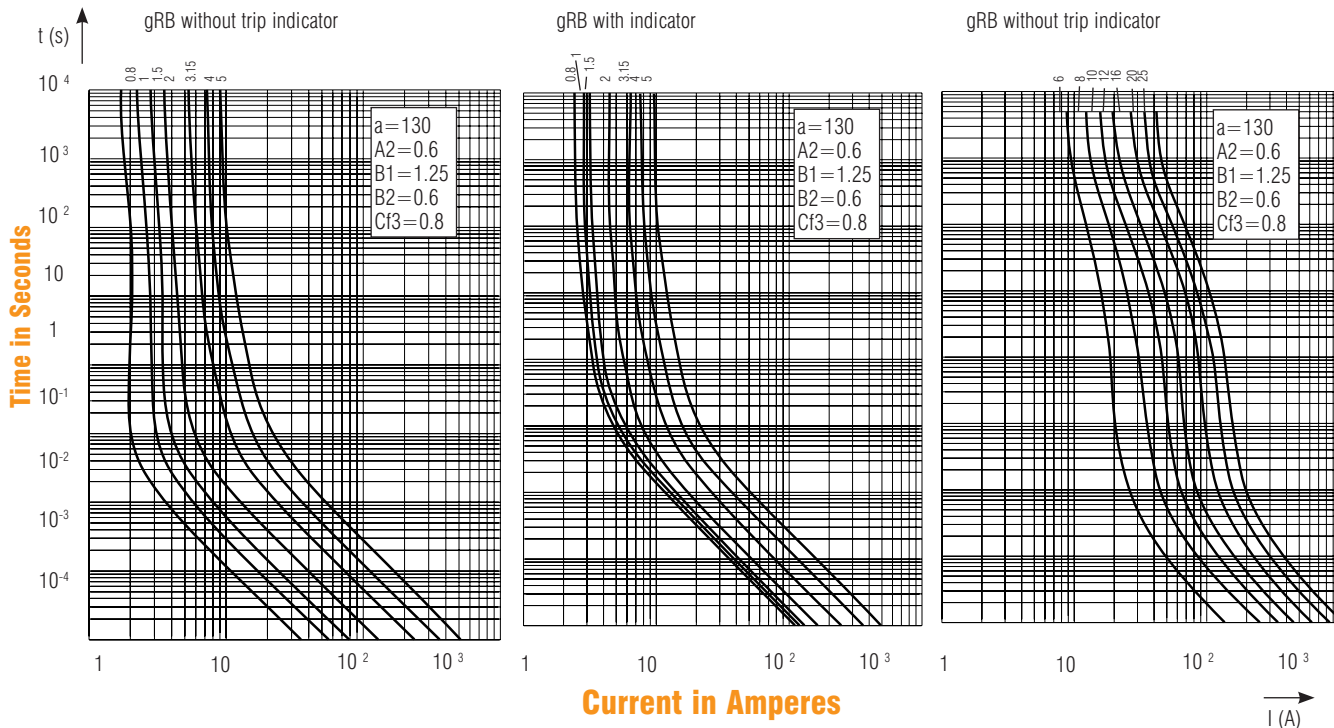

Above: Curves indicate, for each rated current, pre-arcing (melting) time vs. R.M.S. pre-arcing (melting) current.
± 9% tolerance for mean pre-arcing (melting) current