

1000V DC

FERRULE FUSES/SPECIAL PURPOSE



Ferraz Shawmut DCT fuses were developed to meet requirements coming from new applications such as protection of Photovoltaic cells, multi meters and compact on board traction equipment for auxiliary circuits. This high performance DC fuse in its compact size offers multiple competitive advantages particularly for international applications where DC voltage requirements are above 600V DC.

Ratings

- **AC:** 5 to 30A 750V AC, 100,000A I.R. Minimum breaking capacity: 2In
- **DC:** 5 to 30A 1000V DC, 50,000A I.R. Minimum breaking capacity: 3 In

Features/Benefits


- 1000 V DC with L/R = 2ms
- 750 V AC
- Low minimum breaking capacity
- Compact size: 10 X 38 mm (13/32 X 1-1/2) size internationally accepted.
- Ferrule Mount 1 to 30A for design versatility
- Can be used with ULTRASAFE Fuseholders USM series

Approvals

- UL Recognized components
- UL file E60314

Standard Fuse Amp ratings, catalog numbers, I²t (at 50,000 Amps –1000VDC L/R = 10ms)


Ampere rating	Catalog Number	Clearing I ² t(A ² s)	Watt loss @ 100% Rating (W)
5	DCT5-2	64	0.7
8	DCT8-2	83	1.1
10	DCT10-2	127	1.5
12	DCT12-2	215	2.0
15	DCT15-2	495	3.0
20	DCT20-2	755	4.4
25	DCT25-2	970	5.3
30	DCT30-2	1650	5.8

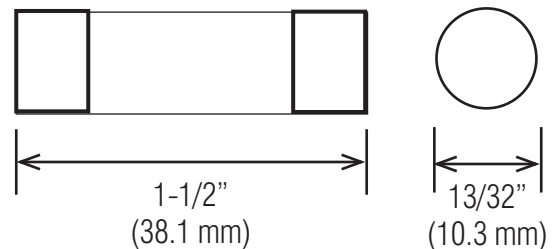


1000V DC

FERRULE FUSES/SPECIAL PURPOSE

Melting Time — Current Data

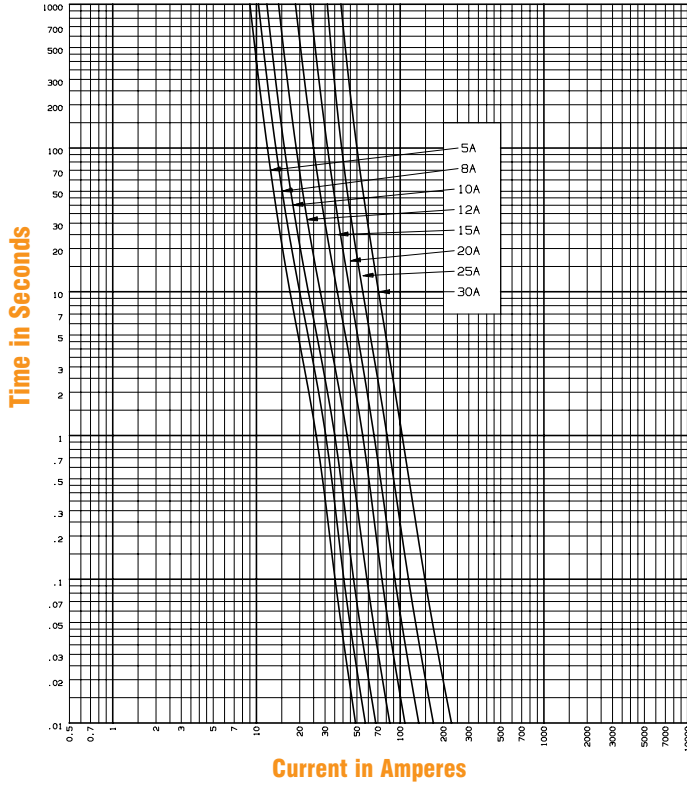

Peak Let-Thru Current

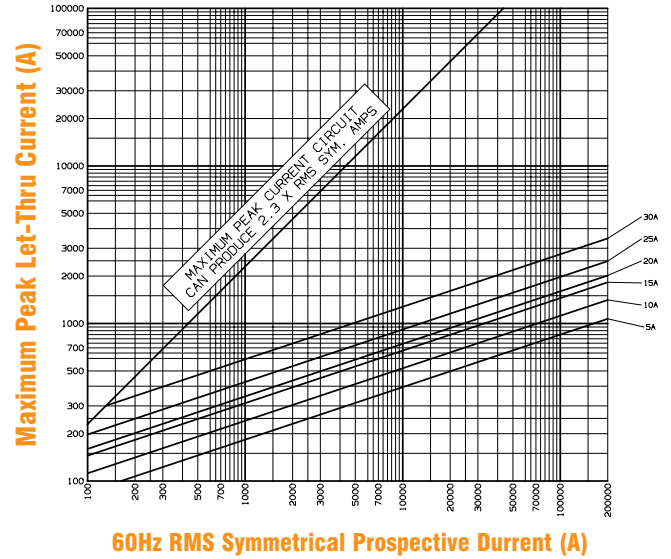

DC Voltage Capabilities vs. Time Constant

