

# FUSEHOLDERS

## FOR MICRO™ FUSE PLUG-IN FUSES

### RF SHIELDED FRONT AND REAR PANEL MOUNT TYPE

Radio frequency shielded space saving design holds FAM and FAMC fuses. Screw-on knob has drip-proof design allowing use when moisture exists at front of panel.

Rated at 5 amperes up to 125 volts.




**Mounting:** Front - maximum panel thickness .093".  
Rear - maximum panel thickness .125".

**Housing, knob and nut:** Aluminum, untreated, chromate finish for RF shielding.

**Mounting Gasket:** Neoprene or conductive silicone.

**Seal:** Buna "N" O-ring inside the knob.

**Terminals:** Beryllium copper. Silver plated.

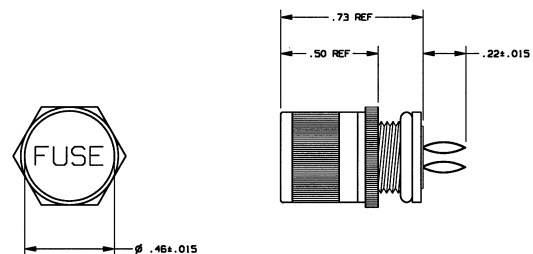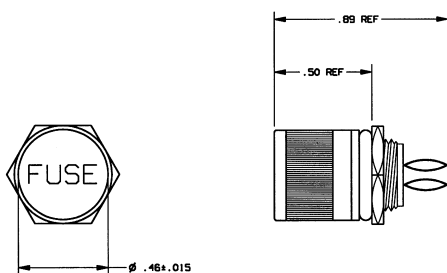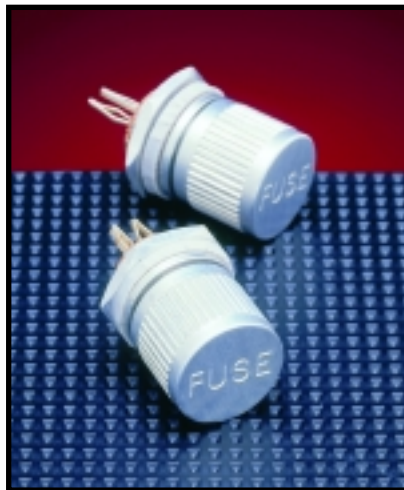

CATALOG NO.	GASKET TYPE
MFH1	Neoprene
MFH7	Conductive

CATALOG NO.	GASKET TYPE
MFH2	Neoprene
MFH8	Conductive